

SB-2812 · SB-2811

4 To 4 COMPOSITE VIDEO BOOSTER

VIDEO BOOSTER

Inputs : 4x Composite Video To Outputs : 4x Composite Video

SB-2812 4x inputs To 4x outputs Booster




SB-2811(BNC) 4x inputs To 4x outputs Booster



INTRODUCTION

SB-2812 is a Video Booster product and SB-2811 use BNC connectors. It's one of the most innovative Composite Video booster products on the market Today. It has 4 individual inputs with 4 individual outputs. Because it is one video to one video booster, So input # 1 will booster by output #1 port. Input #2 Booster to Output #2 too. It completely eliminates the need to constantly move around Composite Video input and output cables. This booster is ideally suitable for boost CCD, Handycam or Video Players extending composite video about 500M~1000M to High Definition LCD HDTV TV for full HD resolutions or Plasma display monitor applications. Control is provided adjust VR volume knobs on upper case.

SB-2812.SB-2811 4 to 4 COMPOSITE VIDEO BOOSTER

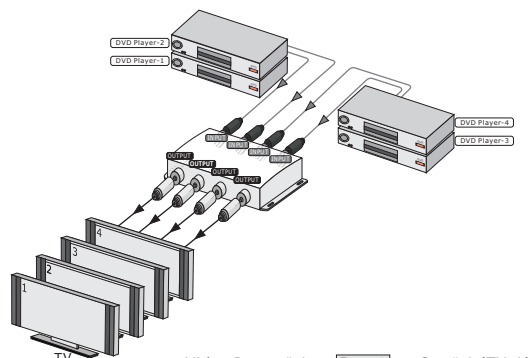

Video Input # 1 → Boost → Out# 1 (TV-1)
Video Input # 2 → Boost → Out# 2 (TV-2)
Video Input # 3 → Boost → Out# 3 (TV-3)
Video Input # 4 → Boost → Out# 4 (TV-4)

4x Inputs to 4x Outputs COMPOSITE VIDEO BOOSTER

FEATURES

1. Support 4 inputs to 4 outputs Composite Video Extend Booster
2. Video Support Composite Video from 4 inputs To 4 Output s
3. Video Boost Volume : 0~+6dB, Video 1Vpp
4. Suitable for CCD device signal extend to HDTV or Plasma monitor displays
5. High Resolution support : 480i , 480p, 720p, 1080i , 1080p
6. Direct VR adjust volume via knob on Front upper case
7. Support TV Video system NTSC or PAL TV Video system
8. Support Line conversion for NTSC 525x525, PAL 625x625
9. Enclosure type : Support wall rack mount able
10. Signals BPR & Stereo Audio (AR/AL)
11. Support Lower power consumed full load under 150 mA
12. Power supply offer a universal type 100~230 VAC switch

SPECIFICATIONS

1. Type of Booster : 4 inputs to 4 outputs Composite Video (BNC) Booster
2. Type of Video : Composite Video via 2812 RCA - 2811 BNC connectors
3. Boost Distance : 300M ~ 1000M (1Vpp)
4. Scan Rates Accepted : 50Hz and 60Hz.
5. TV Video System : NTSC(60Hz) or PAL(50Hz) TV Video system
6. Line Conversion : NTSC 525x525, PAL 625x625
7. Safety Approvals : CE, FCC
8. Dimensions (WxLxH.):
SB-2812 5.04" (128mm) x 2.85" (72.5mm) x 1.08" (27.5mm)
SB-2811 5.04" (128mm) x 2.85" (72.5mm) x 1.08" (27.5mm)
9. Net Weight (Unit Only) : with metal case
SB-2812 0.3kg/0.66 lb
SB-2811 0.3kg/0.66 lb
10. Power Voltage Input : DC 12V @ 1A

SB-2810 · SB-2809

1 To 1 COMPOSITE · S-VIDEO · AUDIO BOOSTER

Input : 1x S-Video(Y/C), Component Video(YPbPr), Stereo Audio(AR/AL)
Output : 1x S-Video(Y/C), Component Video(YPbPr), Stereo Audio(AR/AL)

SB-2810 1x input To 1x output Booster




SB-2809(BNC) 1x input To 1x output Booster



INTRODUCTION

SB-2810 is a Video and Audio Booster product and SB-2809 use BNC connector. It's one of the most innovative Composite Video, S-Video(Y/C) and Stereo Audio booster product on the market Today. It has 1 individual input with 1 individual output. Because it is one video to one video booster, So input will booster by output port. It completely eliminates the need to constantly move around S-Video, Composite Video and stereo audio input and output cables. This booster is ideally suitable for boost CCD, Handycam or Video Players extending composite video or S-Video about 300M ~500M to High Definition LCD HDTV TV or for full HD resolutions or Plasma display Monitor applications. Control is provided adjust VR volume knobs on upper case.

SB-2810-2809BNC 1x1 S-VIDEO/VIDEO/AUDIO BOOSTER

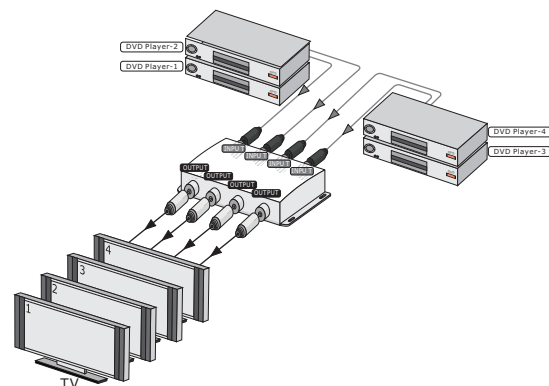

1x Input to 1x Output S-Video/Composite/Audio Booster

FEATURES

- Support 1 input to 1 output Composite/S-Video/Stereo Audio Booster
- Video Support 1 input Extend To 1 Output
- Video Boost Volume : 0~+6dB, Video 1Vpp
- Suitable for CCD device signal extend to HDTV or Plasma monitor displays
- High Resolution support : 480i, 480p, 720p, 1080i, 1080p
- Direct VR adjust volume via knob on Front upper case
- Support Component Video field 50Hz AND 60Hz
- Boost signal extend to 300M~500M
- Enclosure type : Support wall rack mountable
- Signals for S-Video, Component Video & Stereo Audio (AR/AL)
- Support Lower power consumed full load under 210 mA
- Power supply offer a universal type 100~230 VAC switch

SPECIFICATIONS

- Type of Booster : 1 input to 1 output S-Video, Component Video (or BNC) Booster
- Type of Video : S-Video(Y/C) via mini-din 4p connector
Composite Video via RCA connector(SB-2809-BNC)
Stereo Audio via RCA connector
- Boost distance : 300M ~ 500M (1Vpp)
- Scan rates accepted : 50Hz and 60Hz.
- TV Video system : NTSC(60Hz) or PAL(50Hz) TV Video system
- Line conversion : NTSC 525x525, PAL 625x625
- Safety Approvals : CE, FCC
- Dimensions (W.D.H.) :
SB-2810 5.04" (128mm) x 2.85" (72.5mm) x 1.08" (27.5mm)
SB-2809 5.04" (128mm) x 2.85" (72.5mm) x 1.08" (27.5mm)
- Net Weight (Unit Only) : with metal case
SB-2810 0.3kg/0.66 lb
SB-2809 0.3kg/0.66 lb
- Power Voltage Input : DC 12V @ 1A

SB-2820 · SB-2819

1 To 1 COMPONENT VIDEO · AUDIO BOOSTER

COMPONENT AUDIO BOOSTER

Input : 1x Component Video(YPbPr), Stereo Audio(AR/AL)
Output : 1x Component Video(YPbPr), Stereo Audio(AR/AL)

SB-2820 1x input To 1x output Booster



SB-2819(BNC) 1x input To 1x output Booster




INTRODUCTION

SB-2820 is a Component Booster product and SB-2819 use BNC connectors. It's one of the most innovative Component Video - Audio booster products on the market Today. It has 1 individual input with 1 individual output. Because it is one video to one video booster So input # 1 will booster by output #1 port.

It completely eliminates the need to constantly move around Component Video and stereo audio input and output cables. This booster is ideally suitable for boost CCD, Handycam or Video Players extending component video about 300M~500M to High Definition LCD HDTV TV for full HD resolutions or Plasma display Monitor applications. Control is provided adjust VR volume knobs on upper case.

SB-2820.SB-2819 1 to 1 COMPONENT/AUDIO BOOSTER

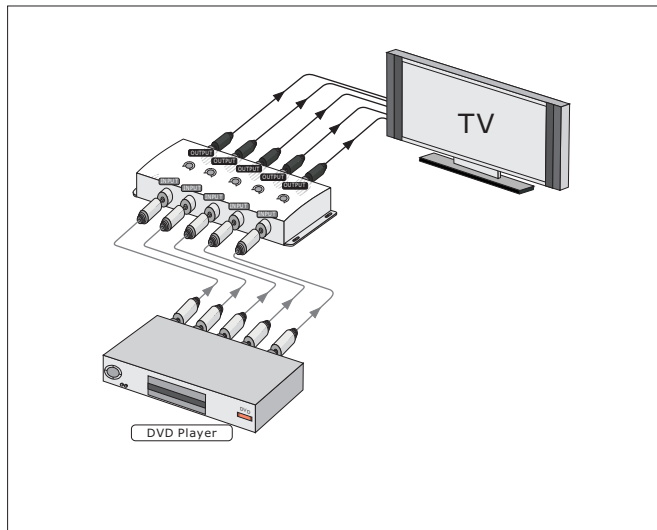

FEATURES

- Support 1 input to 1 output Component Video / Stereo Audio Booster
- Video Support Component Video from 1 input To 1 Output
- Video Boost Volume : 0~+6 dB, Video 1Vpp
- Suitable for CCD device signal extend to HDTV or Plasma monitor displays
- High Resolution support : 480i, 480p, 720p, 1080i, 1080p
- Direct VR adjust volume via knob on Front upper case
- Support Component Video field 50Hz AND 60Hz
- Boost signal extend to 300M~500M
- Enclosure type : Support wall rack mountable
- Signals for Component Video & Stereo Audio (AR/AL)
- Support Lower power consumed full load under 200 mA
- Power supply offer a universal type 100~230 VAC switch

SPECIFICATIONS

- Type of Booster : 1 input to 1 output Component Video (or BNC) Booster
- Type of Video : Composite Video via RCA connector is SB-2820
BNC connector is SB-2819
- Boost distance : 300M ~ 500M (1Vpp)
- Scan rates accepted : 50Hz and 60Hz.
- TV Video system : NTSC(60Hz) or PAL(50Hz) TV Video system
- Line conversion : NTSC 525x525, PAL 625x625
- Safety Approvals : CE, FCC
- Dimensions (W.D.H.) :
SB-2820 5.04" (128mm) x 2.85" (72.5mm) x 1.08" (27.5mm)
SB-2819 5.04" (128mm) x 2.85" (72.5mm) x 1.08" (27.5mm)
- Net Weight (Unit Only) : with metal case
SB-2820 0.3kg/0.66 lb
SB-2819 0.3kg/0.66 lb
- Power Voltage Input : DC 12V @ 1A