

SB-5510


4x2 SCART ROUTING SWITCHER

SCART AUDIO SWITCHER

Inputs : 4x SCART via Scart Female Connectors
Outputs : 2x SCART Via Scart Female Connectors



SB-5510 SCART T SWITCHER 4x2



FEATURES

1. Support SCART 4 inputs To 2 outputs routing switcher
2. Input: 4x SCART (RGB, S-Video, Composite Video and Stereo Audio)
Output: 2x SCART (RGB, S-Video, Composite Video and Stereo Audio)
3. SCART group input/output signals included
RGB
S-Video (Y/C)
Composite Video
Audio: Stereo Audio (AR, AL)
4. Refresh: for HDTV 480i, 480p, 576p, 720p, 1080i, 1080p
5. Control by IR remote and direct selection by front panel express buttons
6. Inputs status with LED display read out via front panel
7. Support ON/OFF power switch on front panel

SPECIFICATIONS

- | | |
|----------------------------------|--|
| 1. Type of Switcher: | 4 in To 2 out SCART Routing Switcher |
| 2. Type of Signal: | SCART (RGB, S-Video, Composite Video and Stereo Audio) |
| 3. Video Bandwidth: | 110 MHz, -3dB (G=+2) |
| 4. High Speed and fast settling: | 5V |
| 5. IR Frequency : | 38KHz |
| 6. Low Power: | 4.4 mA/Amplifier |
| 7. Scan Rates Accepted: | 50Hz or 60Hz |
| 8. Auto Scan monitor screen | 16:9 or 4:3 |
| 9. Lower power consumed: | consumed full load under 650/400Ma |
| 10. Controls: | IR remote controller, front pushbuttons with LED readout |
| 11. Safety approvals: | CE, FCC |
| 12. Dimensions: | 9. 37" x5. 67" x1.83" (238mm x149mm x44mm) |
| 13. Power Supply : | DC12V / 2A |
| 14. Net Weight(Unit Only): | 0.9kg/1.98lb |

SB-5520


4x2 SCART MATRIX SWITCHER

SCART AUDIO MATRIX

Inputs : 4x SCART via Scart Female Connectors
Outputs : 2x SCART via Scart Female Connectors



SB-5520 SCART MATRIX SWITCHER 4x2

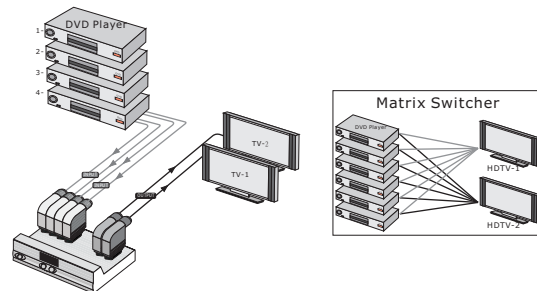

FEATURES

1. Support SCART 4 inputs To 2 outputs matrix switcher
2. Inputs: 4x SCART (RGB, S-Video, Composite Video and Stereo Audio)
Outputs: 2x SCART (RGB, S-Video, Composite Video and Stereo Audio)
3. SCART Group input/output Signals included
RGB
S-Video (Y/C)
Composite Video
Audio: Stereo Audio (AR, AL)
4. Refresh: for HDTV 480i, 480p, 576p, 720p, 1080i, 1080p
5. Control By IR remote and direct selection by front panel express buttons
6. Inputs status with LED display read Out via front Panel
7. Support ON/OFF power switch on front pNet Weight(Unit Only): 0.9kg/1.98lb

SPECIFICATIONS

- | | |
|---------------------------------|--|
| 1. Type of Switcher: | 4 in To 2 out SCART Matrix Switcher |
| 2. Type of Signal : | SCART (RGB, S-Video, Composite Video and Stereo Audio) |
| 3. Video Bandwidth: | 110 MHZ, -3dB (G=+2) |
| 4. High Speed and fast settling | on 5V |
| 5. IR Frequency : | 38 KHz |
| 6. Low Power: | 4.4 mA/Amplifier |
| 7. Scan Rates Accepted: | 50Hz or 60Hz |
| 8. Auto Scan monitor screen: | 16:9 or 4:3 |
| 9. Lower power consumed: | full load under 650/400Ma |
| 10. Controls: | IR remote controller, front pushbuttons with LED readout |
| 11. Safety Approvals: | CE, FCC |
| 12. Dimensions: | 9. 37" x5. 87" x1.73" (238mm x149mm x44mm) |
| 13. Power Supply : | DC12V / 1.25A |
| 14. Net Weight(Unit Only): | 0.9kg/1.98lb |

SB-5525

6x2 SCART MATRIX SWITCHER

SCART AUDIO MATRIX

Inputs : 6x SCART via Scart Female Connectors


Outputs : 2x SCART Via Scart Female Connectors



INTRODUCTION

SB-5525 is a 6:2 MATRIX SCART RGB/S-Video (Y/C)/ Composite Video/ Stereo Audio switching product. The switcher supports 6 individual inputs with 2 individual outputs. The matrix function of SB-5525 can route any input and output to each other. The switcher completely eliminates the need to constantly move around SCART input and output cables. It is ideally suitable for High Resolution TV applications. Control is provide via Front pressed buttons with LED readout or IR remote controller.

SB-5525 SCART MATRIX SWITCHER 6x2

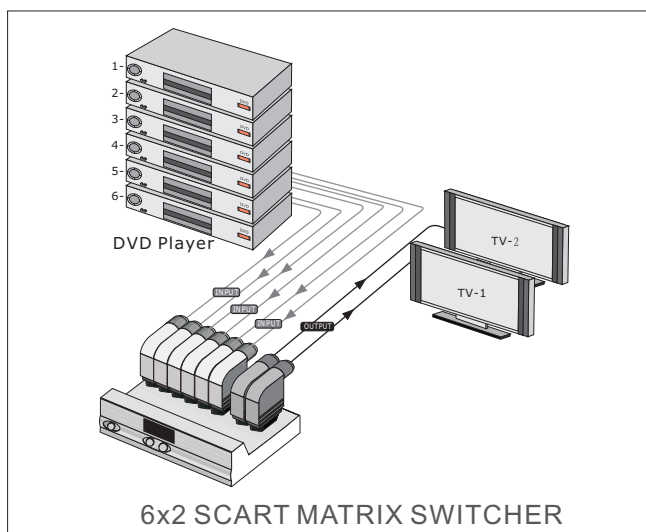

FEATURES

1. Support SCART 6 inputs To 2 Outputs Matrix Switcher
2. Inputs: 6x SCART (RGB, S-Video, Composite Video and Stereo Audio)
Outputs: 2x SCART (RGB, S-Video, Composite Video and Stereo Audio)
3. SCART Group input/output Signals included
RGB
S-Video (Y/C)
Composite Video
Audio: Stereo Audio (AR, AL)
4. Refresh: for HDTV 480i, 480p, 576p, 720p, 1080i, 1080p
5. Control By IR Remote and Direct Selection by Front Panel express Buttons
6. Inputs status with LED display Read Out via front Panel
7. Support ON/OFF Power switch on Front Panel

SPECIFICATIONS

1. Type of Switcher: 6 in To 2 out SCART Matrix Switcher
2. Type of Signal : SCART (RGB, S-Video, Composite Video and Stereo Audio)
3. Video Bandwidth: 110 MHz, -3dB (G=+2)
4. High Speed and fast settling on 5V
5. IR Frequency : 38 KHz
6. Low power of 4.4 mA/Amplifier
7. Scan rates accepted: 50Hz or 60Hz
8. Auto Scan 16:9 or 4:3 monitor screen
9. Support Lower power consumed full load under 650/400mA
10. Controls: IR remote controller, front pushbuttons with LED readout
11. Safety approvals: CE, FCC,
12. Dimensions: 9.37" x5.87" x1.73" (238mm x149mm x44mm)
13. Power Supply : DC12V / 1.25A
14. Net Weight(Unit Only): 0.9kg/1.98 lb


SB-3715

1x4 SCART DISTRIBUTION AMPLIFIER

SCART AUDIO AMPLIFIER

Input : 1x SCART via Scart Female Connector
Outputs : 4x SCART Via Scart Female Connectors

SB-3715 SCART DISTRIBUTION AMPLIFIER 1x4



FEATURES

1. Support SCART 1 input To 4 Outputs Routing Switcher
2. Input : 1x SCART (RGB, S-Video, Composite Video and Stereo Audio)
Outputs: 4x SCART (RGB, S-Video, Composite Video and Stereo Audio)
3. SCART Group input/output Signals included
RGB
S-Video (Y/C)
Composite Video
Audio: Stereo Audio (AR, AL)
4. Refresh: for HDTV 480i, 480p, 576p, 720p, 1080i, 1080p
5. Auto Scan 16:9 and 4:3 Screen Line vision
6. Power on status with LED display on power switch
7. Power Supply for 100~230VAC, 12VDC Universal Type switch

SPECIFICATIONS

1. Type of Switcher: 1 in To 4 out SCART Routing Switcher
2. Type of Signal : SCART (RGB, S-Video, Composite Video and Stereo Audio)
3. Video Bandwidth: 110 MHz, -3dB (G=+2)
4. High Speed and fast settling on 5V
5. HDTV 480i, 480p, 576p, 720p, 1080i, 1080p
6. Low power of 4.4 mA/Amplifier
7. Scan rates accepted: 50Hz or 60Hz
8. Auto Scan 16:9 or 4:3 monitor screen
9. Support Lower power consumed full load under 650/400mA
10. Controls: power switch with LED readout
11. Safety approvals: CE, FCC
12. Dimensions: 6.95" x3.15" x1.0" (176mm x80mm x25mm)
13. Power Supply : DC12V / 1A
14. Net Weight(Unit Only): 0.5kg/1.1 lb


SB-3720

1x8 SCART DISTRIBUTION AMPLIFIER

SCART AUDIO AMPLIFIER

Input : 1x SCART via Scart Female Connector
Outputs : 8x SCART via Scart Female Connectors

SB-3720 SCART DISTRIBUTION AMPLIFIER 1x8



FEATURES

1. Support SCART 1 input To 8 Outputs Routing Switcher
2. Input : 1x SCART (RGB, S-Video, Composite Video and Stereo Audio)
Outputs: 8x SCART (RGB, S-Video, Composite Video and Stereo Audio)
3. SCART Group input/output Signals included
RGB
S-Video (Y/C)
Composite Video
Audio: Stereo Audio (AR, AL)
4. Refresh: for HDTV 480i, 480p, 576p, 720p, 1080i, 1080p
5. Auto Scan 16:9 and 4:3 Screen Line vision
6. Power on status with LED display on power switch
7. Power Supply for 100~230VAC, 12VDC Universal Type switch

SPECIFICATIONS

1. Type of Switcher: 1 in To 8 out SCART Routing Switcher
2. Type of Signal : SCART (RGB, S-Video, Composite Video and Stereo Audio)
3. Video Bandwidth: 110 MHz, -3dB (G=+2)
4. High Speed and fast settling on 5V
5. HDTV 480i, 480p, 576p, 720p, 1080i, 1080p
6. Low power of 4.4 mA/Amplifier
7. Scan rates accepted: 50Hz or 60Hz
8. Auto Scan 16:9 or 4:3 monitor screen
9. Support Lower power consumed full load under 650/400mA
10. Controls: power switch with LED readout
11. Safety approvals: CE, FCC
12. Dimensions: 9.37" x5.67" x0.98" (238mm x144mm x25mm)
13. Power Supply : DC12V / 1A
14. Net Weight (Unit Only): 0.8kg/1.76 lb

SB-3722

2x1x8 SCART SWITCHER-DISTRIBUTION AMPLIFIER

SCART AUDIO MATRIX


Inputs : 2x SCART via Scart Female Connectors
Outputs : 8x SCART Via Scart Female Connectors



INTRODUCTION

The SB-3722 is one of the most innovative SCART signal switch and distribution product. The SB-3722 Support 2 SCART sources inputs switch to 8 SCART TV or SCART display outputs distribution amplifier. SCART support signals included of RGB S-Video (Y/C), Composite Video and Stereo Audio (AR/AL). This product provides 8 SCART outputs that are identical to the source signal. It is suitable for distributing signals from full HD HDTV, Resolutions for 480i, 480p, 576p, 720p, 1080i and 1080p. Also the VCRs, Camcoders, Video Game Consoles, Video CDs, DVDs, Satellite Receivers, CATV Set Top Boxes, DVB/T....etc.

SB-3722 SCART SWITCHER-DISTRIBUTION AMPLIFIER

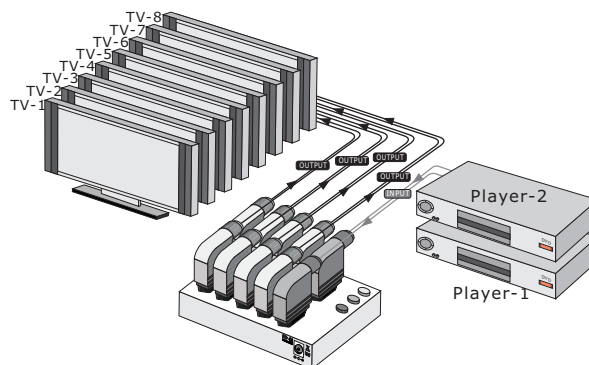

SB-3722 SCART DISTRIBUTION AMPLIFIER 2x1x8

FEATURES

1. Support SCART 2 inputs switch to 8 outputs Distribution Amplifier
2. Input : 2x SCART (RGB, S-Video, Composite Video and Stereo Audio)
Outputs: 8x SCART (RGB, S-Video, Composite Video and Stereo Audio)
3. SCART Group input/output Signals included
RGB
S-Video (Y/C)
Composite Video
Audio: Stereo Audio (AR, AL)
4. Refresh: for HDTV 480i, 480p, 576p, 720p, 1080i, 1080p
5. Auto Scan 16:9 and 4:3 Screen Line vision
6. Power on status with LED display on power switch
7. Power Supply for 100~230VAC, 12VDC Universal Type switch

SPECIFICATIONS

1. Type of Switcher: 2 In To 8 out SCART Switcher-Distribution Amplifier
2. Type of Signal : SCART (RGB, S-Video, Composite Video and Stereo Audio)
3. Video Bandwidth: 380 MHz (13dB), 200 mVp-p
4. High Speed and fast settling on 5V
5. HDTV 480i, 480p, 576p, 720p, 1080i, 1080p
6. Low all hostile crosstalk of -83dB @5Mhz
7. Scan rates accepted: 50Hz or 60Hz
8. Auto Scan 16:9 or 4:3 monitor screen
9. Support Lower power consumed full load under 650/400mA
10. Controls: Front press buttons with LED readout
11. Safety approvals: CE, FCC
12. Dimensions: 9.37" x 5.67" x 0.98" (238mm x 144mm x 25mm)
13. Power Supply : DC12V / 2A
14. Net Weight (Unit Only) 0.8kg/1.76 lb