SB-6357

VGA Audio To HDMI Converter

VGA CONVERTER

Input : 1x VGA, 1x Audio
Output : 1x HDMI

Ear Rack :
#WM-1INCH-130MM

DIAGRAM TYPICAL

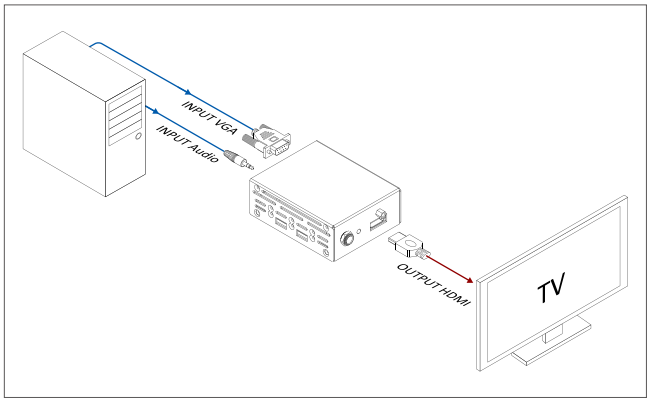

FEATURES

01. Analog VGA To HDMI Digital Audio Video Converter
02. Inputs : 1xVGA+Stereo Audio
03. Outputs : 1x HDMI (Digital Video/Audio)
04. Automatically detect and pass through the signal from HDMI to VGA
05. Support Video input and output resolution up to 1920x1200
06. Easy installation and no need of setting
07. Wall mounted Ear Rack included
08. Support Universal power adaptor for AC 100V~240V, 50/60Hz

SPECIFICATIONS

Video/Audio Input Signals	VGA + Stereo Audio
Video/Audio outputs	HDMI(Digital Video+Digital Audio)
Stereo Audio	1x Audio (3.5mm jack)
Video Support	Up to WUXGA 1920x1200
Safety Approvals	CE, FCC
Dimension (WxDxH)	3.54" x 2.36" x 1" (90mm x 60mm x 26mm)
Weight	0.25 kgs / 0.55 lb
Power Supply	12VDC, Universal type 50/60Hz 100~230 VAC

SB-6358

HDMI To VGA Audio Converter

VGA CONVERTER

Input : 1x HDMI
Output : 1x VGA, 1x Audio

Ear Rack :
#WM-1INCH-130MM

DIAGRAM TYPICAL

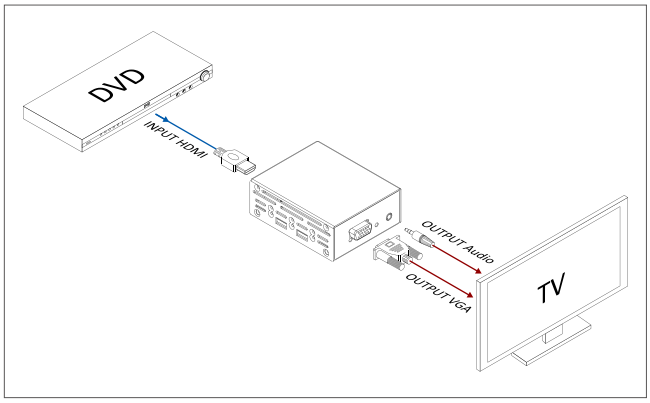

FEATURES

01. Support HDMI Digital Audio Video to Analog VGA Converter
02. Inputs : 1x HDMI (Digital Video/Audio)
03. Outputs : 1x VGA+Stereo Audio
04. Automatically detect and pass through the signal from HDMI to VGA
05. Support Video input and output resolution up to 1920x1200
06. Support Stereo Audio(PCM 2ch) outputs
07. Easy installation and no need of setting
08. Wall mounted Ear Rack included
09. Support Universal power adaptor for AC 100V~240V, 50/60Hz

SPECIFICATIONS

Video/Audio Input Signals	HDMI(Digital Video+Digital Audio)
Video/Audio outputs	VGA+ Stereo Audio
Stereo Audio	1x Audio (3.5mm jack)
Video Support	Up to WUXGA 1920x1200
Audio Support	Stereo Audio(PCM 2ch)
Safety Approvals	CE, FCC
Dimension (WxDxH)	3.54" x 2.36" x 1" (90mm x 60mm x 26mm)
Weight	0.25 kgs / 0.55 lb
Power Supply	12VDC, Universal type 50/60Hz 100~230 VAC

© 2015 Copyrighted All Rights Reserved.

SB-2818

VGA To COMPONENT CONVERTER

Input : 1x VGA(RGBHV), 1x Stereo Audio
Output : 1x Component(YPBPR), 1x Stereo Audio

VGA | COMPONENT | CONVERTER

INTRODUCTION

SB-2818 is one of the most innovative VGA / AUDIO (AR/AL) and Stereo Audio Signals Connect to Component Video (YPBPR) Monitor / Stereo Audio (AR/AL) converters on the market today. It is used to convert VGA and Audio signals to Component Video+Audio via RCA connectors.
This product provides high- quality Component Resolution, 480i/p, 720p, 1080i/p outputs that are identical to the quality of source signals. It is useful for converting and scaling up and down VGA video signals to video of high HD resolution quality on Component Video (YPBPR) display.

DIAGRAM TYPICAL

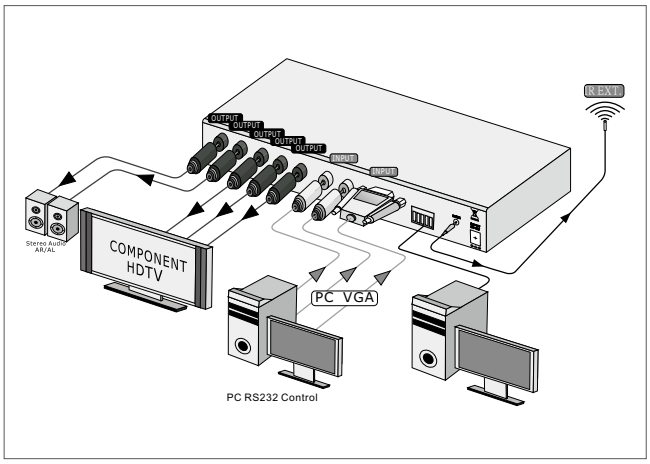

FEATURES

01. VGA to Component Video Converter
02. Inputs Video : 1x VGA (RGBHV)
    Audio : 1x Stereo Audio(AR/AL)
    Outputs Video : 1x Component Video (YPBPR)
    Audio : 1x Stereo Audio(AR/AL)
03. Automatically detect input resolution for VGA, SVGA, XGA, SXGA, WXGA, WSXGA+, WUXGA
04. Automatically down Scale and up Scale for video input/output
05. Selections for input Component Video 50 & 60 Hz, resolution of 480p/720p/1080p
06. Support 3D motion adaptive de-interlacing SD up to HD

SPECIFICATIONS

Input Signals	Video : VGA(RGBHV) via 1x HD-15P Female Connector Audio : Stereo Audio(AR/AL) via 2x RCA connectors
Outputs Signals	Video : Component Video(YPBPR) via 3x RCA connectors Audio : Stereo Audio via 2x RCA connectors
Output Selections	Component Video resolution and Frequency of 50/60Hz
Video bandwidth	350MHz, (-3dB), Audio Bandwidth: 50MHz, (-3dB)
Audio Frequency Respond	20Hz~20KHz
Safety Approvals	CE, FCC
Dimension (WxDxH)	8.27” x 4.49” x 1.06” (210mm x 114mm x 27mm)
Power Supply	12VDC, Universal type 50/60Hz 100~230 VAC, 2A
Weight	0.7 kgs / 1.54 lb

© 2015 Copyrighted All Rights Reserved.

SB-2829

COMPONENT To VGA CONVERTER

VGA | COMPONENT | CONVERTER

Input : 1x Component Video(YPBPR), 1x Stereo Audio
Output : 1x VGA(RGBHV), 1x Stereo Audio

DIAGRAM TYPICAL

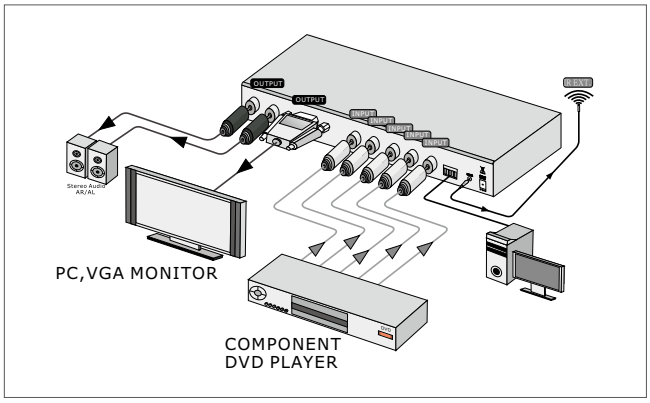

FEATURES

01. Support Component Video to VGA Converter
02. Inputs Video : 1x Component Video (YPBPR)
    Audio : 1x Stereo Audio (AR/AL)
    Outputs Video : 1x VGA (RGBHV)
    Audio : 1x Stereo Audio (AR/AL)
03. Automatic detection HDTV Component Video Standards 480p, 720p AND, 1080i/p Resolution system
04. Automatically control Down Scaling and Up Scaling for Video in/out
05. Direct Output VGA Resolution VGA, SVGA, XGA, SXGA, WXGA, WSXGA+, WUXGA Selections

SPECIFICATIONS

Input Signals	Video : Component Video(YPBPR) 3x via RCA Connectors Audio : Stereo Audio(AR/AL) 2x via RCA Connectors
Outputs Signals	Video : VGA(RGBHV) 1x via HD-15P connector Audio : Stereo Audio via 2x RCA connectors
Output Selections	Direct VGA Resolution Output Selections
Video bandwidth	350MHz, (-3dB)
Audio Bandwidth	50MHz, (-3dB)
Audio Frequency Respond	20Hz~20KHz
Safety Approvals	CE, FCC
Dimension (WxDxH)	8.27" x 4.49" x 1.06" (210mm x 114mm x 27mm)
Power Supply	12VDC, Universal type 50/60Hz 100~230 VAC, 2A
Weight	0.7 kgs / 1.54 lb

SB-2834

VIDEO / S-VIDEO To COMPONENT CONVERTER

VIDEO | S-VIDEO | COMPONENT | CONVERTER

Input : 1x Composite Video, 1x S-Vidoe, 1x Stereo Audio(AR/AL)
Output : 1x Component(YPBPR), 1x Digital Audio, 1x Audio

DIAGRAM TYPICAL

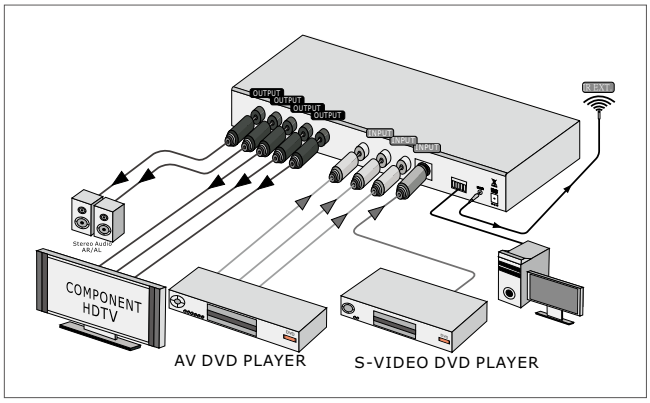

FEATURES

01. Support CVB S/ SV to Component Video Converter
02. Inputs Video : 1x Composite Video & 1x S-Video (Y/C)
    Audio : 1x Stereo Audio (AR/AL)
    Out put s Video : 1x Component Video (YPBPR)
    Audio : 1x Digital Audio (PCM), 1x Stereo Audio (AR/AL)
03. Automatic detection TV Standards system NT SC-M3.58, NT SC-JEia, PAL, PAL-N, PAL-60, PAL-M input system
04. Automatic control UP and Dow n Screen when Video or S-Video in/out
05. Direct Selection the Component Video 480p / 720p / 1080p Resolutions out put
06. Support 5% of overscan range of HDTV Screen output
07. Support Screen up/ down and adjusted

SPECIFICATIONS

Input Signals	Video : Composite Video 1x RCA & 1x S-Video(Y/C) & 1x 4p Mini -Din Connector Audio : Stereo Aud io(AR/AL) 2x RCA & Digital Audio via 1x RCA Connector
Outputs Signals	Video : Component Video (YPBPR) via 3x RCA connectors Audio : Stereo Audio (AR/AL) 2x RCA Connectors
Output Selection	Direct Component Video Resolution and Frequency 50/60Hz Output Selections
Video Bandwidth	20 0M Hz, (-3dB)
Audio Frequency Respond	50 MHz, (-3dB)
Audio Bandwidth	20 Hz~ 20 KHz
Safety Approvals	CE, FCC
Dimension (WxDxH)	8.27" x 4.49" x 1.06" (210mm x 114mm x 27mm)
Power Supply	12VDC, Universal type 50/60Hz 100~230 VAC, 2A
Weight	0.7 kgs / 1.54 lb

© 2015 Copyrighted All Rights Reserved.

SB-2833

HDMI / DVI To VGA / DIGITAL / AUDIO CONVERTER

VGA CONVERTER

Input : 1x HDMI, 1x DVI
Output : 1x VGA, 1x Digital Audio, 1x Stereo Audio

DIAGRAM TYPICAL

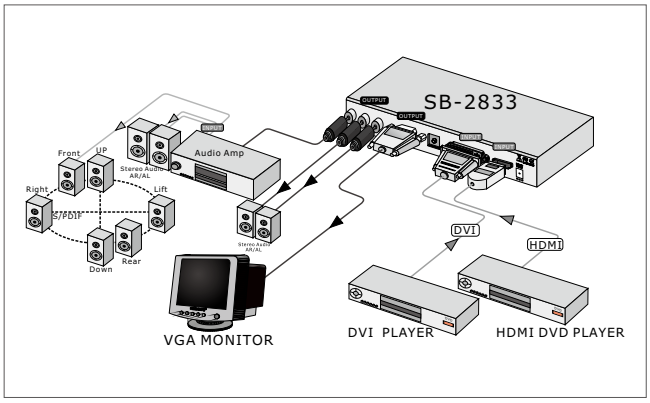

FEATURES

01. Support HDMI/DVI Digital Audio Video to Analog VGA Converter
02. Inputs : 1x HDMI (Digital Video/Audio) & 1x DVI (Digital Video)
    Outputs: 1xVGA+Stereo Audio & 1x Digital Audio(PCM)
03. Automatic detecting video of 480P,720P and 1080i/p from HDMI and DVI input
04. Direct HDMI & DVI input selection by buttons on front panel
05. VGA Output resolution selections :
    SVGA (800x600), XGA (1024x768), SXGA (1280x1024),
    WSXGA (1366x768), WXGA (1440x900), WSXGA+ (1680x1050),
    UGA (1600x1200), WUXGA (1920 x 1200)
06. Support Digital Audio (PCM) and Stereo Audio outputs

SPECIFICATIONS

Video / Audio Input Signals	HDMI : Digital Video, Digital Audio (PCM), 1x HDMI connector DVI : Digital Video, 1x DVI connector
Video / Audio Outputs	VGA (RGBHV) : 1x via HD-15 Female connector Digital Audio (PCM) : 1x via RCA connector Stereo Audio : 2x via RCA Connectors
Video Bandwidth	350MHz, (-3dB), Audio Bandwidth : 50MHz, (-3dB)
Audio Frequency Respond	Audio Frequency Respond : 20Hz~20KHz
Safety Approvals	Safety Approvals : CE, FCC
Dimension (WxDxH)	8.27" x 4.49" x 1.06" (210mm x 114mm x 27mm)
Power Supply	12VDC, Universal type 50/60Hz 100~230 VAC, 2A
Weight	0.7 kgs / 1.54 lb

SB-2835

VGA To HDMI CONVERTER

VGA CONVERTER

Input : 1x VGA, 1x Stereo Audio
Output : 1x HDMI (Video+Audio), 1x Digital Audio

DIAGRAM TYPICAL

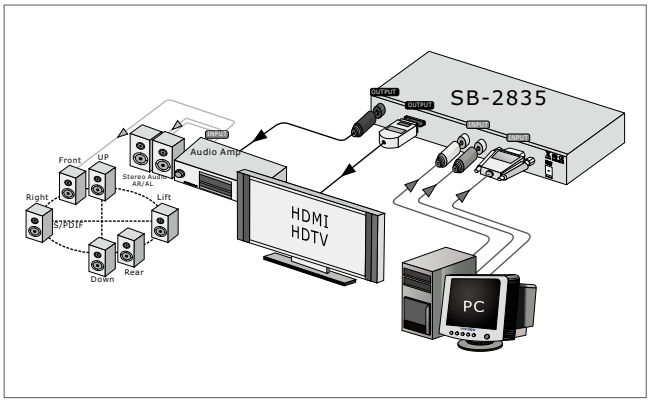

FEATURES

01. VGA to HDMI Converter
02. Inputs : 1x VGA (RGBHV) & 1x Stereo Audio (AR/AL)
    Outputs : Video : 1x HDMI (Digital Video + Digital Audio)
    Audio : 1x Digital Audio (PCM)
03. Automatically detects for VGA, SVGA, XGA signal
04. Highest input resolution is SXGA (1280x1024)
05. Output automatically scan HDMI resolution of 480p, 720p or 1080i/p
06. Support HDMI version 1.3 with HDCP Compliant
07. Support audio (PCM) outputs

SPECIFICATIONS

Video / Audio Input Signals	VGA (RGBHV) 1x HD-15p Female Connector Stereo Audio(AR/AL) 2x via RCA Connectors
Video / Audio outputs Signals	HDMI, 1x HDMI connector Digital Audio (PCM) 1x via RCA connector
Video Bandwidth	450MHz, (-3dB), Audio Bandwidth : 50MHz, (-3dB)
Audio Frequency Respond	20Hz~20KHz
Safety Approvals	CE, FCC
Dimension (WxDxH)	8.27" x 4.49" x 1.06" (210mm x 114mm x 27mm)
Power Supply	12VDC, Universal type 50/60Hz 100~230 VAC, 2A
Weight	0.7 kgs / 1.54 lb

© 2015 Copyrighted All Rights Reserved.

SB-3680

SCART-RGB To S-VIDEO/VIDEO/AUDIO CONVERTER

SCART VIDEO CONVERTER

Input : 1x SCART(RGB), 1x Stereo Audio
Output : 1x S-Video, 1x Composite Video, 1x Stereo Audio

DIAGRAM TYPICAL

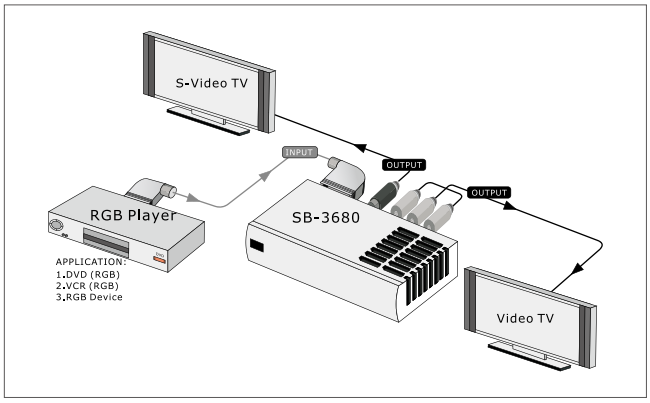

INTRODUCTION

SB-3680 is one of the most innovative SCART (RGB) Decoder products. It converts RGB signals from SCART plug device (full pin connected) in to S-Video or Composite Video and Stereo Audio signals. It is perfect for SCART (RGB) Video device, such as Video Game Consoles, Video CDs, DVDs, Satellite Receivers, CATV Set Top Boxes, and works well with TV set. The video from output of S-Video and Composite Video will be showed simultaneously.

FEATURES

01. SCART To S-Video / Composite Video / Audio Converter
02. Support S-Video (Y/C) 100Vpp/75Ω and Stereo Audio (AR/AL)
03. Video Bandwidth: 80MHz (-3dB)
04. Audio: Stereo Audio (AR/AL)
05. Gain Flatness: 0.1dB to 20MHz, RL=150Ω
06. Differential Gain Error: 0.03%, RL=150Ω
07. Differential Phase Error: 0.030,RL=150Ω
08. Switch SCART input signals to video signals for TV monitors and plasma displays
09. It is also suitable for SCART RGB signals
10. Terminals: SCART plug, Mini-4din Female, RCA connectors
11. Safety approvals: CE, FCC, VCCI
12. Dimension (WxDxH): 6.02" x 3.07" x 1.42" (153mm x 78mm x36mm)
13. Power Supplyt: DC12V / 1A
14. Weight : 0.25 Kg / 0.55 lb

SB-2840

SCART-RGB To COMPONENT-AUDIO CONVERTER

SCART COMPONENT CONVERTER

Input : 1x SCART(RGB), 1x Stereo Audio
Output : 1x Component Video (YPBPR), 1x Stereo Audio

DIAGRAM TYPICAL

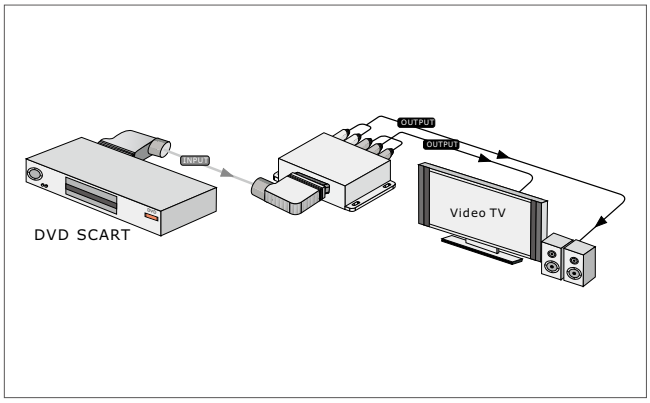

INTRODUCTION

SB-2840 is one of the most innovative converter for switching SCART (RGB / Stereo Audio) to YUV Component Video (YPBPR / YCBCR) / Stereo Audio Signals. This product provides high resolution HDTV quality output which is able to detect source and output the correspondent video signal. It is ideal for distributing signals from SCART-RGB DVD or High resolution SCART-RGB Video source to HDTV displays at high resolutions.

FEATURES

01. SCART To SDTV Component Video/ Audio Converter
02. Support Component Y/Pb/Pr, Y/CbCr.1.00Vpp/75Ω, Stereo Audio(AR/AL)
03. Video Bandwidth : >165MHz (-3dB), 200 mVp-P
04. YUV output for SDTV 480i (13.50MHz), 480P (27.00MHz)
05. Gain Flatness: 0.1dB to 20MHz, RL=150Ω
06. Differential Gain Error : 0.03%, RL=150Ω
07. Differential Phase Error : 0.030,RL=150Ω
08. Switch SCARTsignal form devices into TV monitors and plasma displays
09. Suitable for 480i, 480P
10. Use RCA connectors
11. Wall mountable
12. Safety approvals: CE, FCC
13. Dimension (WxDxH) : 5.04" x 2.85" x 1.08" (128mm x 72.5mm x 27.5mm)
14. Power Supply: DC12V / 1A
15. Weight: 0.3 Kg / 0.66 lb

© 2015 Copyrighted All Rights Reserved.